

# BALL CHECK VALVE

**APPLICATIONS:** waste water, sewage water, heavy water, thick and viscose liquids, clear water



## FLANGED

DN 40 to DN 400

Temperature from -10°C to +80°C

Max. working pressure 10 bar

Mounting between flanges ISO PN 10


## FLANGED

DN 50 to DN 200

Temperature -10°C to +80°C

Max. working pressure 16 bar

Mounting between flanges ISO PN 16

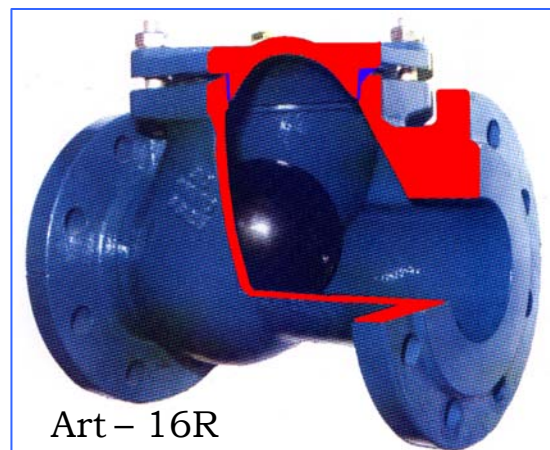

## THREADED

DN 1<sup>1</sup>/<sub>4</sub>" to DN 3"

Temperature from -10°C to +80°C

Max. working pressure 10 bar

**EXPORTED BY :**  
**KOMO mark s.r.o.**  
Sabinova 154/6  
721 00 Ostrava-Svinov

*Phone* : 0040 596 624 438  
*Fax* : 0040 596 624 438  
*E-mail* : [komo@komo.cz](mailto:komo@komo.cz)  
*website* : [www.komo.cz](http://www.komo.cz)